
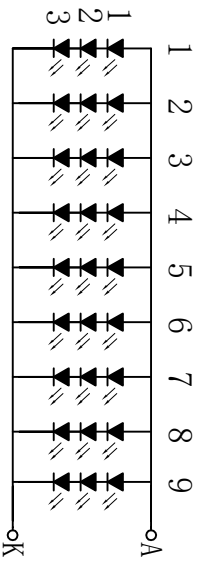


正视图


侧视图

背视图

1	LED+
2	LED+
3	LCD_VGH
4	LCD_VGL
5	UPDN
6	SHLR
7	LED-
8	LED-
9	LCD+10V
10	GND
11	MIP1_TDP3
12	MIP1_TDN3
13	GND
14	MIP1_TDP2
15	MIP1_TDN2
16	GND
17	MIP1_TCP
18	MIP1_TCN
19	GND
20	MIP1_TDP1
21	MIP1_TDN1
22	GND
23	MIP1_TDP0
24	MIP1_TDN0
25	GND
26	STRYB
27	LIRSTB
28	VD0
29	VD0
30	VCOM

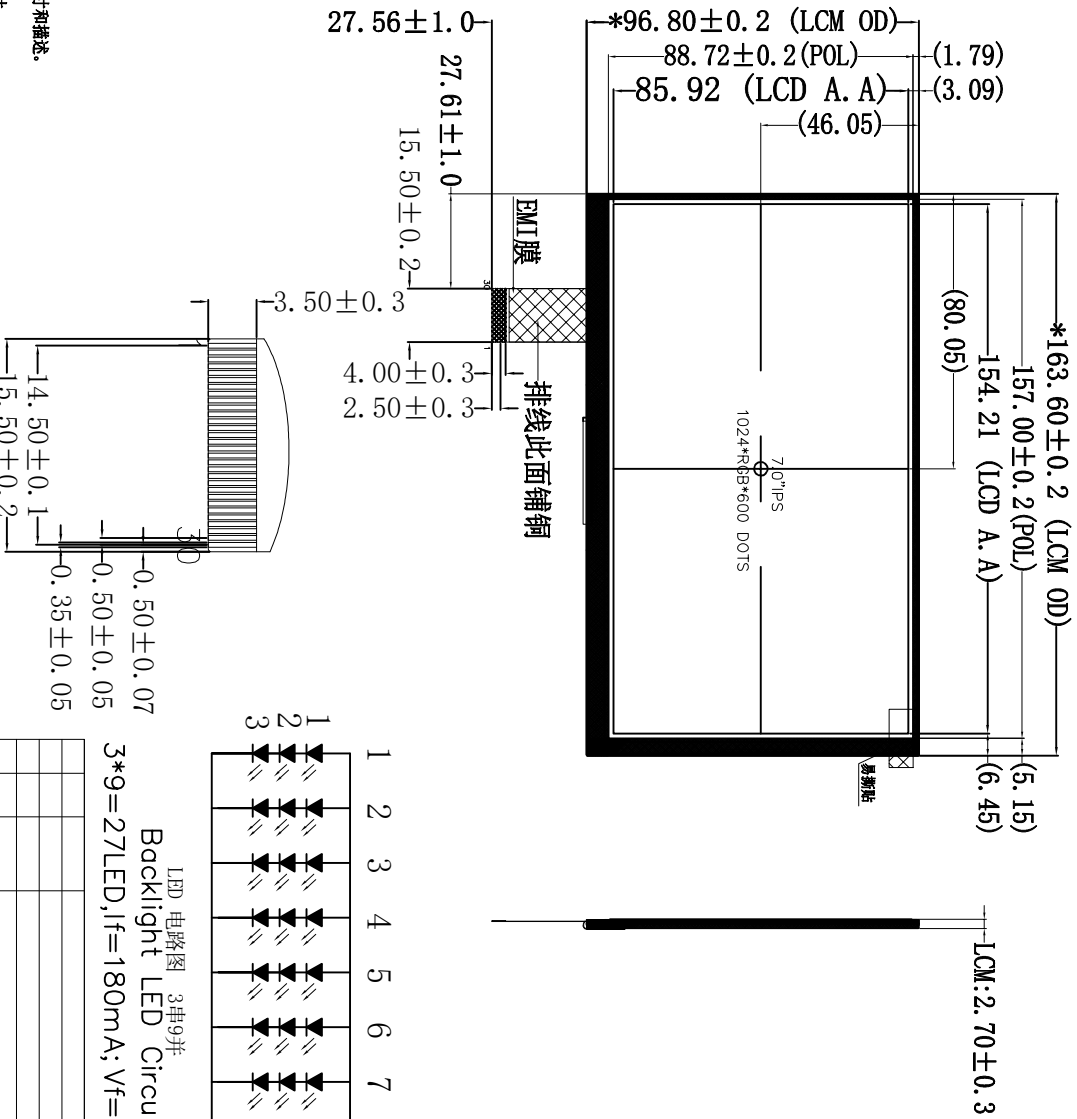


FPC弯折示意图
FPC弯折出货

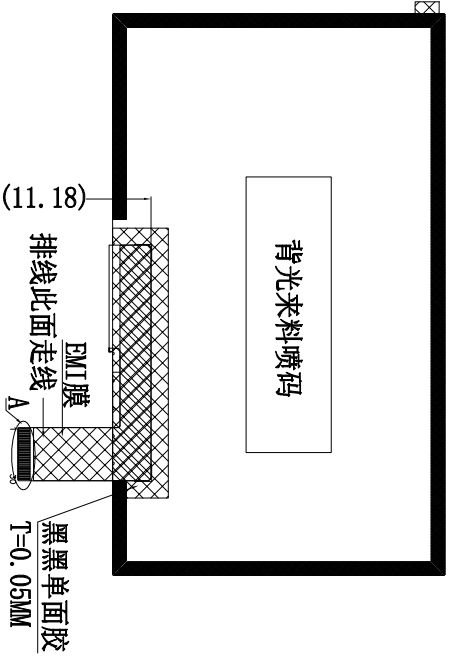

注意:

- 1、请仔细阅读图纸中红色标注的尺寸和描述。
- 2、未注公差要求为±0.2mm。
- 3、图面标有“*”标识的严格控制尺寸。
- 4、图面标注格式(...)为参考尺寸。
- 5、环保要求: RoHS。

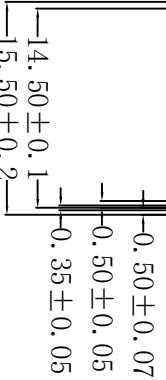

00	修订	20210224	First Issue	修订内容
01	修订			
02	修订			
03	修订			
04	修订			
05	修订			
06	修订			
07	修订			
08	修订			
09	修订			
10	修订			

TYPE	LCM	MODEL NO.	GD33385A
PART No.	料号	PROJECT	G07027AB01A0
SHEET 1 OF 1		SCALE	1:1
3RD ANGLE		UNIT	mm
APPROVED BY	CHECKED BY	DRAWN BY	
核准	审查	制图	
Display Type	RM7.1024*600" TFT LCD		
Driver IC	HX9607M0/HX9227MCA		
Interface	MIPI		
Operating Voltage	VDD=1.8V		
Luminance	450 cd/m ² (Typ.)		
Backlight Init	721.B, V=8.4V-10.2V, I=180mA		
Storage Temp.	-20° C TO 60° C		
Operation Temp.	-20° C TO 60° C		