


TFT PIN ASSIGNMENT

NO.	SIGNAL
1	GND
2	CTP-CLK
3	CTP-RST
4	CTP-DATA
5	CTP-INT
6	SPI-CLK
7	TFT-RESET
8	SPI-RS
9	GND
10	SPI-DATA
11	VDD 3.3V
12	SPI-CS
13	LED-
14	SPI-TE
15	GND


CTP PIN ASSIGNMENT

PIN NAME	
1	GND
2	SCL
3	SDA
4	INT
5	VCC

CLK \sim R2/NC \sim GND
 元件要符合ROHS

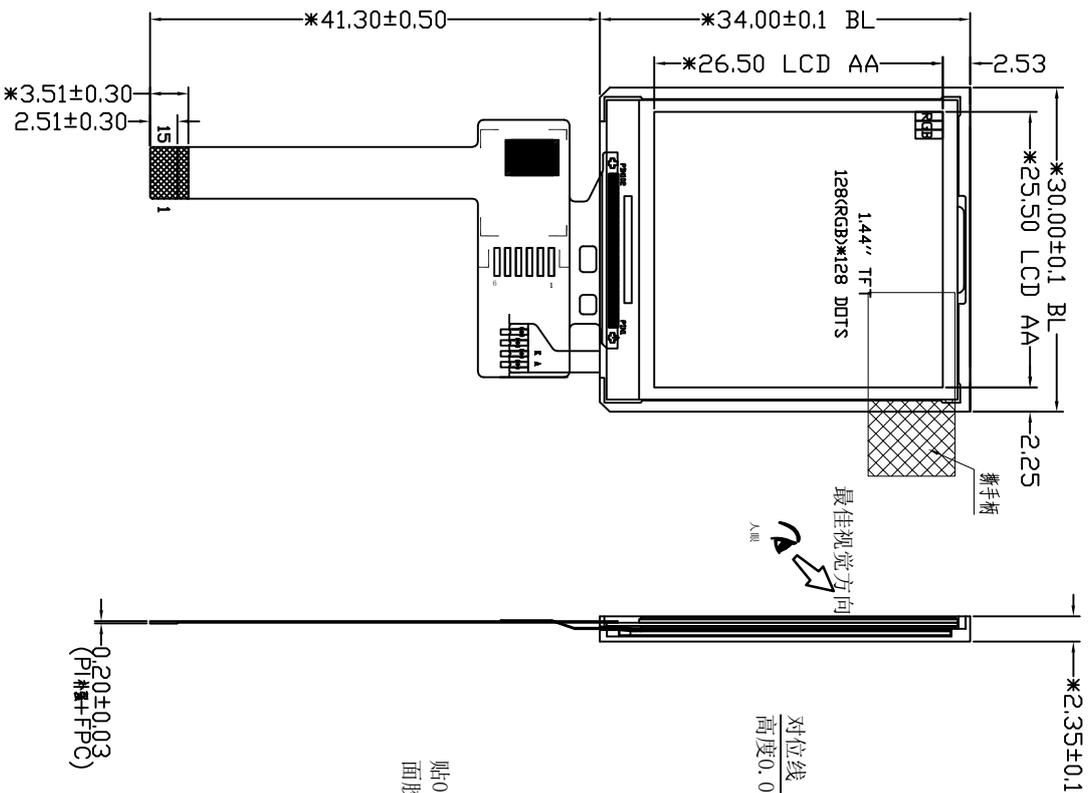

模组要展开，贴合完焊接
 完再弯折贴在屏背面

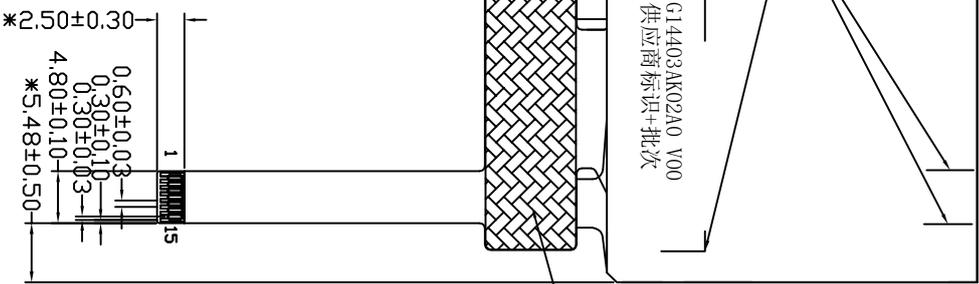

Display Type	HSD 1.44", 128*128*0-SI TFT LCD
Driver IC	CC9106
Interface	TFT SPI-4-
Operating Voltage	VDD:3.3V
Luminance/CIE	430 cd/m2(tp)/x:0.315±0.03,y:0.33±0.03
Backlight Unit	WHITE 3LED(30mA)
Storage Temp.	-30°C TO 80°C
Operation Temp.	-20°C TO 70°C

TYPE	LCM	MODEL NO.	GD3468B	APPROVED BY	CHECKED BY	DRAWN BY
类别:		项目号:		核准		制图
PART No. 料号	G14403AK01A0	SCALE 比例	1:1			
SHEET 1 OF 1		UNIT 单位	mm			
3RD ANGLE						

版本	修改	修改日期	修改内容	核准
01		2002/02/23	首版发行	JHQ

- 注意:
- 1、请仔细确认图纸中红色标注的尺寸和描述。
 - 2、未注公差要求为 $\pm 0.2\text{mm}$ 。
 - 3、图面标有"*"标识的严格控制尺寸。
 - 4、图面标注格式(...)为参考尺寸。
 - 5、环保要求: RoHS.